



<sup>®</sup>  
**Krono  
Original**  
High Quality  
Made by Kronospan

# 2023

**flooring  
assortment**



Made by Kronospan

# Welcome to our world!

SURFACE TEXTURES	04
FEATURES GUIDE	05
PRODUCT OVERVIEW	06

---

<b>Organic VENEER PARQUET</b>	08
<b>Rocko SPC Flooring</b>	18
<b>O.R.C.A. Flooring</b>	42
<b>Organic FLEX</b>	48
<b>Organic LONG</b>	56
<b>Organic CLASSIC</b>	60
<b>Organic CLEVER SILENT</b>	72

<b>mo.re! Laminate Flooring</b>	78
<b>Classic Laminate Flooring</b>	100

---


ACCESSORIES	144
DECOR OVERVIEW	152
PACKAGING INFORMATION	154



[www.krono-original.com](http://www.krono-original.com)

[www.facebook.com/KronoOriginal](https://www.facebook.com/KronoOriginal)




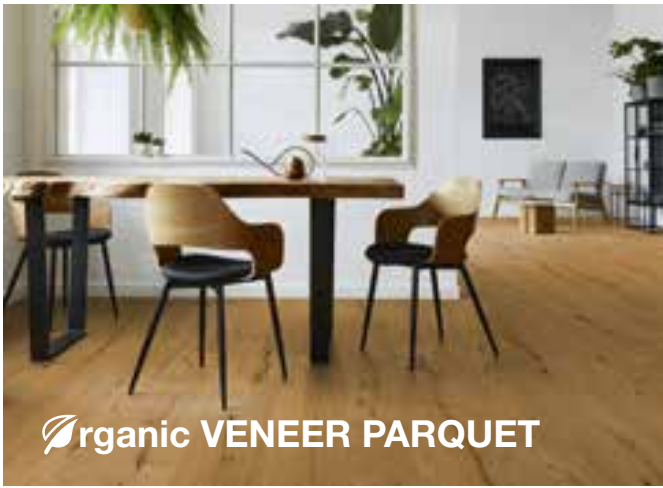

**Organic VENEER PARQUET**




**Rocko SPC Flooring**

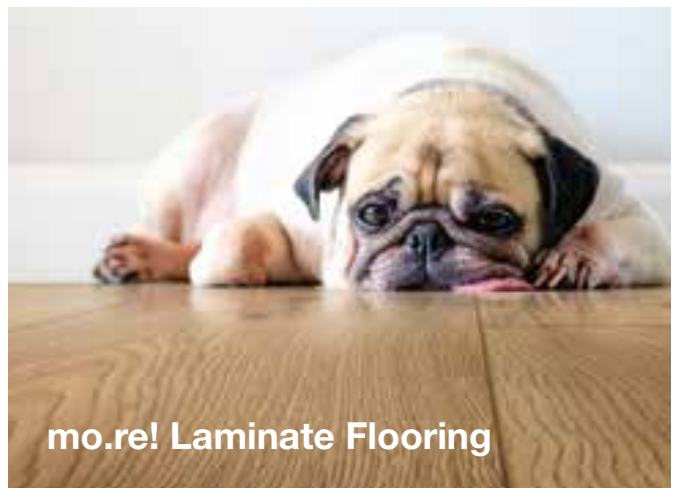

**mo.re! Laminate Flooring**



**O.R.C.A. Flooring**

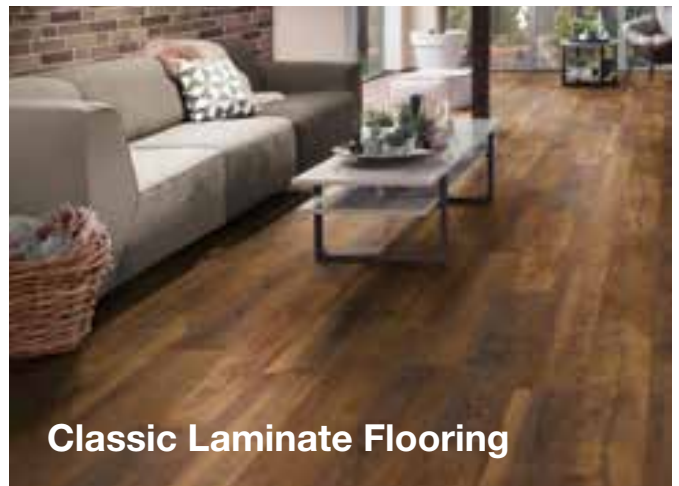











**Classic Laminate Flooring**



**Accessories**

## Surface textures

The look and feel of real wood and stone



# Features guide

## Your benefits at a glance



Residential guarantee

All floors are put through a series of rigorous tests in order to comply with international quality standards, which is why we grant an extensive residential warranty with every product.



Real groove

Bevelled edges on all four sides of the plank ensure an authentic floorboard look.



Soft bevel

Inspired by traditional craftsmanship, the true-edge-bevels provide a harmonious room appearance.



Anti bacterial comfort

A.B.C. Anti Bacterial Comfort inhibits the growth of bacteria on your flooring and provides you with the peace of mind that comes from a healthy home environment. (Tested germs: Staphylococcus aureus).



Authentic embossed

The synchronous pores follow the grain of the decor, meaning they flawlessly mimic the character of natural wood.



Microscratch protect

The robust surface protects your flooring against microscratches that can be caused by strong mechanical stresses or the claws of house pets.



Pet-proof

Thanks to the robust surface, which is also undaunted by small mishaps, the flooring is exceptionally well-suited for life with house-pets.



Light-resistant

The flooring is light-resistant: Even on days when the sun is shining for hours, your flooring remains non-fading according to rating 6, the highest level of the Blue Wool Scale.



Silent

Due to an integrated pad, the flooring reduces impact sound, echoes and vibrations. An additional underlay is not required, which saves time and money.



Robust

This flooring is amazingly robust due to its super durable surface. Moving furniture or falling objects are not a problem because of its high pressure and impact resistance.



Warm underfoot

Due to its flexible design layer, the flooring has comfortable haptics and is warm underfoot.




Anti-slip class

Safety is something we put great emphasis on. Classification in anti-slip classes has been achieved through specially developed surface structures, which address the requirements for floor coverings in the workplace and commercial areas where a high risk of slipping is present.



Anti-slip class

Classification:  
R9 and R10 according to DIN 51330,  
A: according to DIN 51097



Design diversity

Up to 60 different panels on digitally printed design are possible. This lends your flooring an authentic appearance that is virtually free of repetition.




Soft touch

The flooring has a soft surface and feels very comfortable.



Real wood



































This floor is made from real wood. The high-quality brushed oak surface gives every room natural elegance.



Anti-static

The flooring provides complete protection against unpleasant shocks. The Anti-static is built-in and guaranteed for the life of the floor.

# Product overview

	Collection Name	Durability (Wear Resistance)	Coreboard (Water protection)	Thickness
Veneer Parquet	<b>rganic<sup>*1</sup> VENEER PARQUET</b> 1383 x 244 mm   54.45" x 9.61"	 <b>Titanium Ultra</b>	 <sup>*2</sup> <b>m.re!</b> moisture resistance technology 	8.5 mm
SPC Flooring	<b>ROCKO</b> 1210 x 192 mm   47.64" x 7.56"	 <b>Titanium Ultra</b>	 <b>SPC</b> 	5+1 mm PerfectPad <sup>®</sup> IXPE
	1210 x 192 mm   47.64" x 7.56" 1210 x 234 mm   47.64" x 9.21" 1210 x 295 mm   47.64" x 11.61"	 <b>Titanium Ultra</b>	 <b>SPC</b> 	5 mm
O.R.C.A. Flooring	<b>rganic<sup>*1</sup> FLEX</b> 638 x 322 mm   25.12" x 12.68" 1288 x 189 mm   50.71" x 7.44"	 <b>Titanium Ultra</b>	 <sup>*3</sup> <b>O.R.C.A.</b> MOISTURE DEFENSE TECHNOLOGY 	7 mm PerfectPad <sup>®</sup> Cork
	<b>rganic<sup>*1</sup> LONG</b> 2003 x 195 mm   78.86" x 7.68"	 <b>AC5</b>	 <sup>*3</sup> <b>O.R.C.A.</b> MOISTURE DEFENSE TECHNOLOGY 	8 mm
	<b>rganic<sup>*1</sup> CLASSIC</b> 635 x 327 mm   25.00" x 12.87" 1285 x 192 mm   50.59" x 7.56"	 <b>AC5</b>	 <sup>*3</sup> <b>O.R.C.A.</b> MOISTURE DEFENSE TECHNOLOGY 	8 mm
	<b>rganic<sup>*1</sup> CLEVER SILENT</b> 1288 x 195 mm   50.71" x 7.68"	 <b>AC5</b>	 <sup>*3</sup> <b>O.R.C.A.</b> MOISTURE DEFENSE TECHNOLOGY 	6+1 mm PS Pad
mo.re! Laminate Flooring	<b>ALTITUDE</b> 2000 x 242 mm   78.74" x 9.53"	 <b>AC5</b>	 <sup>*4</sup> <b>m.re!</b> moisture resistance technology 	12 mm
	<b>ATLANTIC 12</b> 1285 x 192 mm   50.59" x 7.56"	 <b>AC5</b>	 <sup>*4</sup> <b>m.re!</b> moisture resistance technology 	12 mm
	<b>ATLANTIC 8</b> 1285 x 192 mm   50.59" x 7.56"	 <b>AC4</b>	 <sup>*4</sup> <b>m.re!</b> moisture resistance technology 	8 mm
Classic Laminate Flooring	<b>VINTAGE</b> 1285 x 192 mm   50.59" x 7.56"	 <b>AC4</b>	<b>HDF</b>	10 mm
	<b>IMPRESSIONS</b> 635 x 327 mm   25.00" x 12.87"	 <b>AC4</b>	<b>HDF</b>	8 mm
	<b>SUPER NATURAL</b> 1285 x 192 mm   50.59" x 7.56"	 <b>AC4</b>	<b>HDF</b>	8 mm
	<b>CASTELLO</b> 1285 x 192 mm   50.59" x 7.56"	 <b>AC4</b>	<b>HDF</b>	8 mm

\*1 Consists of natural wood and an organic chemical binder

\*2 Tested according to NALFA Laminate Surface Swell Test and according to ISO 4760 (Topical moisture resistance — Assembled joint)

\*3 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, [www.100hour-test.com](http://www.100hour-test.com), up to 100 h no leakage

Utilization Class	Pet-proof	Residential Guarantee <sup>*5</sup>	Bevel	Joint	Synchro	SKUs
32 		20 years	Soft Bevel	Tap Loc	-	9
34 		30 years	V4	1 clic 2go pure	-	8
34 		30 years	V4	1 clic 2go pure	-	24
34 		30 years	V4	1 clic 2go pure+	-	11
33 		30 years	V4	1 clic 2go pure+	Yes	6
33 		30 years	V4	1 clic 2go pure	Yes <sup>*6</sup>	17
32 		20 years	V4	1 clic 2go pure+	-	9
33 		30 years	V4	1 clic 2go pure	Yes	6
33 		30 years	V4	1 clic 2go pure	Yes	6
32 		20 years	V4	1 clic 2go pure	Yes <sup>*6</sup>	15
32 		30 years	V4	1 clic 2go pure	Yes	17
32 		20 years	V4	1 clic 2go pure	Yes <sup>*6</sup>	6
32 		20 years	V4	1 clic 2go pure	Yes <sup>*6</sup>	23
32 		20 years	-	twin clic	-	10

Σ 167

\*4 48 h splash-water protection according to works standard specification KRONOSPAN WN-103, [www.floor-with-more.com](http://www.floor-with-more.com)

\*5 According to warranty terms

\*6 Selected decors



## The sustainable alternative to parquet

These wooden floorings are luxurious, cosy and natural. The high-quality brushed oak surface lends homely flair to any room. With the Veneer Parquet series, KRONOSPAN offers authentic wood floors with a real wood veneer as the top layer.



The special thing about it: KRONOSPAN combines the natural properties of the raw material wood with the technical refinements of a multi-layer construction. The top layer consists of a 0.6 millimeter wood veneer – the wood comes exclusively from sustainable forestry. The middle layer consists of a high-density fibreboard (HDF). This makes the flooring particularly stable and durable. Thanks to these properties, Veneer Parquet is a resource-saving and sustainable alternative to conventional parquet flooring.



The innovative feature, mo.re! technology, is the intelligent moisture protection. This means the real wooden surface of the floor is also protected for just in case.



Real wood



Feel the nature



LU Ultramatt surface





**Real wood flair  
with protection  
against moisture**







Residential  
guarantee



Utilization  
class



Soft bevel

### **Ultramatt surface**

Real wood flair

### **Eco-friendly**

Wood from sustainably managed forests

### **Moisture resistant\***

thanks to mo.re! technology

### **Soft bevel**

True-Edge-Bevel for a harmonious room appearance

### **Easy installation**

Ideal for renovations thanks to low profile height

### **Modern wide planks: 1383 x 244 mm**

Amazing designs

\* Tested according to NALFA Laminate Surface Swell Test and according to ISO 4760 (Topical moisture resistance — Assembled joint)





# The sustainable alternative to parquet




# Organic VENEER PARQUET



**O274** Oak Sunderland, LU



Thickness 8.5 mm  
Lock Tap Lock



EN 14354



**O273** Oak Bradford, LU



**O462** Oak Schönbrunn, LU



**O274** Oak Sunderland, LU


 rganic VENEER PARQUET



**O350** Oak Cream, LU



Thickness 8.5 mm  
Lock Tap Lock



EN 14354



**O940** Oak Versailles, LU



**O350** Oak Cream, LU




**O352** Oak Roast, LU

**Organic VENEER PARQUET**



**O272** Oak Bristol, LU

Thickness 8.5 mm  
Lock Tap Lock



EN 14354



**O272** Oak Bristol, LU



**O941** Oak Alhambra, LU



**O351** Oak Smoke, LU

# ROCKO

Flooring by Kronospan

## Waterproof SPC flooring with superior performance

### Innovative SPC floors with unique design

Waterproof Rocko Flooring, made of over 70 % of mineral core, finished with high-quality UV coating, is an outstanding material for domestic and commercial use, both in new projects and renovations.

### Appearance of natural wood & stone

Rocko Flooring designs are digitally printed, reflecting the smallest detail, the rich grain of wood and roughness of stones and concrete.

### Ensured stability


Rocko Flooring range is set apart from other types of vinyl flooring by its unique resilient core, which provides an incredibly stable base for each flooring plank and ensures dimensional stability, even with high temperature fluctuations.

## Coordinated solution

Available in 3 different formats, allows for any design finishing, going beyond the standard flooring frame. It comes with complementary accessories: waterproof flooring skirting boards, underlay and cleaning liquid for coordinated solution.



Check out the  
complete collection!

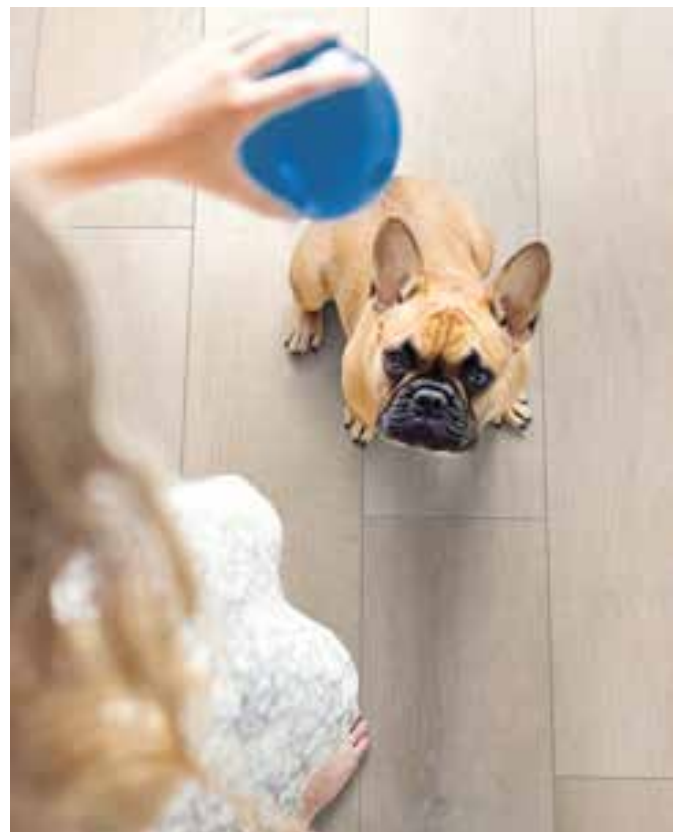





**A solid step up**



# ROCKO

Flooring by Kronospan



## **Waterproof**

Rocko Flooring is suitable for indoor use in dry and humid conditions, such as bathroom, laundry room, kitchen or vestibule.

## **Dimensional stability**

Rocko Flooring does not change its dimensions under the influence of temperature and humidity changes. It can be used in sunny and shaded areas as well as in dry and humid ones.

## **Utility class**

Due to its parameters, Rocko Flooring reaches the highest utility classes. It can be used in intensively used domestic areas as corridor or kitchen, as well as in commercial spaces with high traffic, such as offices.

## **Underfloor heating**

Rocko Flooring is well suited for underfloor heating, thanks to its mineral content. It has very good thermal conductivity parameters.

## **V-groove**

Real v-groove on 4 sides of each plank.







R082 Humidor, SO

**ROCKO**




with **PerfectPad®** IXPE 1 mm



**R073** Scandipure, HS



Thickness 5+1 mm  
Lock 1cllic 2go pure



EN 16511



**R073** Scandipure, HS



**R081** Crescendo, HS



**R070** Incando, SO

**ROCKO**



with **PerfectPad®** IXPE 1 mm



**R078** Airflow, HS




**R078** Airflow, HS



**R077** Barista, HS

Thickness 5+1 mm  
Lock 1clíc 2go pure



EN 16511



**R065** Rope, HS



**R076** Bourbon Cask, SO



**R082** Humidor, SO

**ROCKO**



1210 mm  
(47.64")

192 mm  
(7.56")

**R079** Salt Mine, SO



Thickness 5 mm  
Lock 1clic 2go pure



EN 16511



**R079** Salt Mine, SO



**R071** Crystal Shore, SO



**R078** Airflow, HS

**ROCKO**



**R077** Barista, HS



**R077** Barista, HS

Thickness 5 mm  
Lock 1cllic 2go pure



EN 16511



**R065** Rope, HS



**R076** Bourbon Cask, SO



**R082** Humidor, SO



**ROCKO**



**R081** Crescendo, HS



**R081** Crescendo, HS

Thickness 5 mm  
Lock 1cllic 2go pure



EN 16511



**R073** Scandipure, HS



**R070** Incando, SO



**R090** Castlebridge, SO

**ROCKO**



1210 mm  
(47.64")  
234 mm  
(9.21")

**R066** Sculpta, HS



Thickness 5 mm  
Lock 1cllic 2go pure



EN 16511



**R066** Sculpta, HS



**R063** Alkemi, HS



**R063** Alkemi, HS

**ROCKO**



**R150 Brenton, SO**

Thickness 5 mm  
Lock 1clic 2go pure



EN 16511



**R148** Clamshell, SO



**R150** Brenton, SO





**ROCKO**



**R129** White Poppy, SO

Thickness 5 mm  
Lock 1cllic 2go pure



EN 16511



**R129** White Poppy, SO



**R109** Concrete, PT



**K538** Dovetai Arosa, PT

**ROCKO**



**R128** Ascot, SO



Thickness 5 mm  
Lock 1cllic 2go pure



EN 16511



**R125** Mornel, SO



**R128** Ascot, SO



**R149** Brown Marten, SO

**ROCKO**



**R126** Bashmore, SO

Thickness 5 mm  
Lock 1cllic 2go pure



EN 16511



**R123** Nutmeg, SO



**R126** Bashmore, SO



**R124** Clove, SO






**MOISTURE DEFENSE TECHNOLOGY**

## How O.R.C.A. technology works

Each fiber is encapsulated with a special binder that prevents it from absorbing water

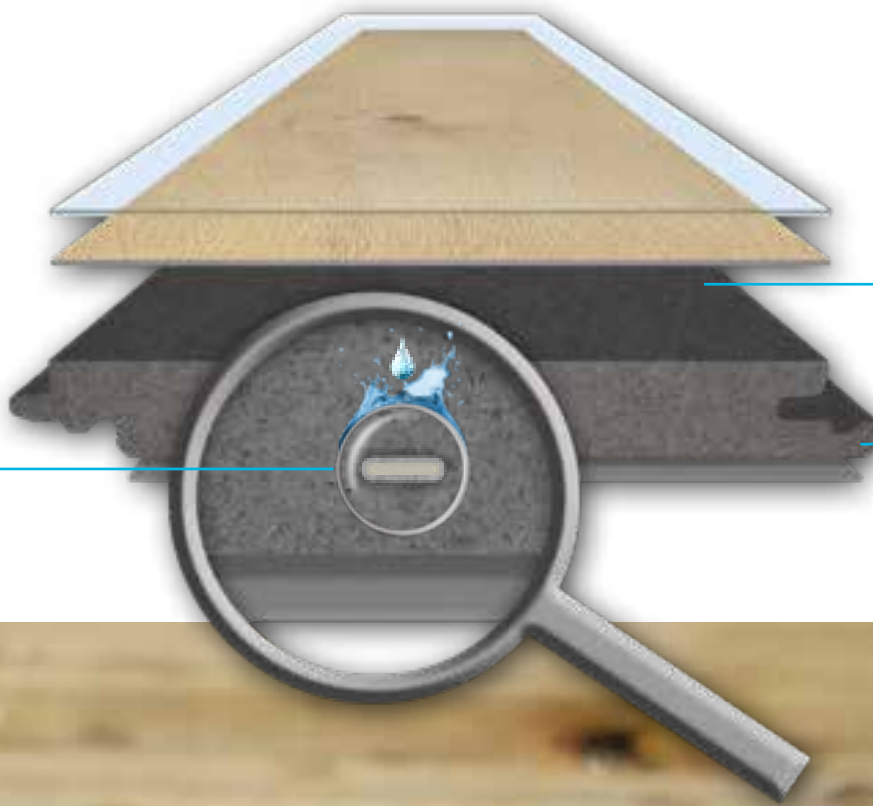

Short fiber length and geometry reduces potential expansion

Micro expansion on the edges seals the connection between planks





## Wood's self sealing property

Wood expands when exposed to moisture and in doing so seals itself, preventing liquid penetration

Boat builders take advantage of wood's natural self sealing property

Wine barrels are still sealed using this time tested method







**MOISTURE DEFENSE TECHNOLOGY**

## The floor that combines the best

**O.R.C.A. = Organic\*\* Rigid Coreboard Abrasion-proof**

### **O.R.C.A. is twice as good**

It unites the best qualities of biologically based floors and conventional waterproof floor coverings. In O.R.C.A., organic\*\* materials are made resistant to liquids by means of a special technology.

### **O.R.C.A. makes the flooring usable anywhere**

The innovative O.R.C.A. board makes it possible to install the flooring even in private bathrooms\*\*\* where, until now, only vinyl or tiles could be used. Furthermore, thanks to their outstanding thermal stability and non-fading properties, O.R.C.A. products also can be used in conservatories and rooms with floor-to-ceiling windows.

### **O.R.C.A. floors are extremely robust**

The robust surface with an AC5 durability rating, protects the flooring against microscratches that can be caused by strong mechanical stresses such as moving furniture, falling objects or the claws of house pets. Thanks to its durable properties, which are also undaunted by small mishaps, O.R.C.A. floors are exceptionally well-suited for life with house pets.

### **O.R.C.A. is built better because it is more elaborately manufactured**

The wood fibers are mechanically processed multiple times in a special production process to obtain especially small fibers. Further on in the manufacturing process a specially developed, organic-chemical binding agent surrounds even the finest fibers and isolates them from moisture.

## The floor that's not afraid of water

### **100 h+ splash-water protection guaranteed\***

Little accidents occur almost daily. Wherever such things are bound to happen, it's worth relying on O.R.C.A. Kitchen, dining room, bathroom – O.R.C.A. is a perfect fit.



Scan the QR code and convince yourself!




\* 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, [www.100hour-test.com](http://www.100hour-test.com), up to 100 h no leakage

\*\* Consists of natural wood and an organic chemical binder

\*\*\*Please observe installation instructions



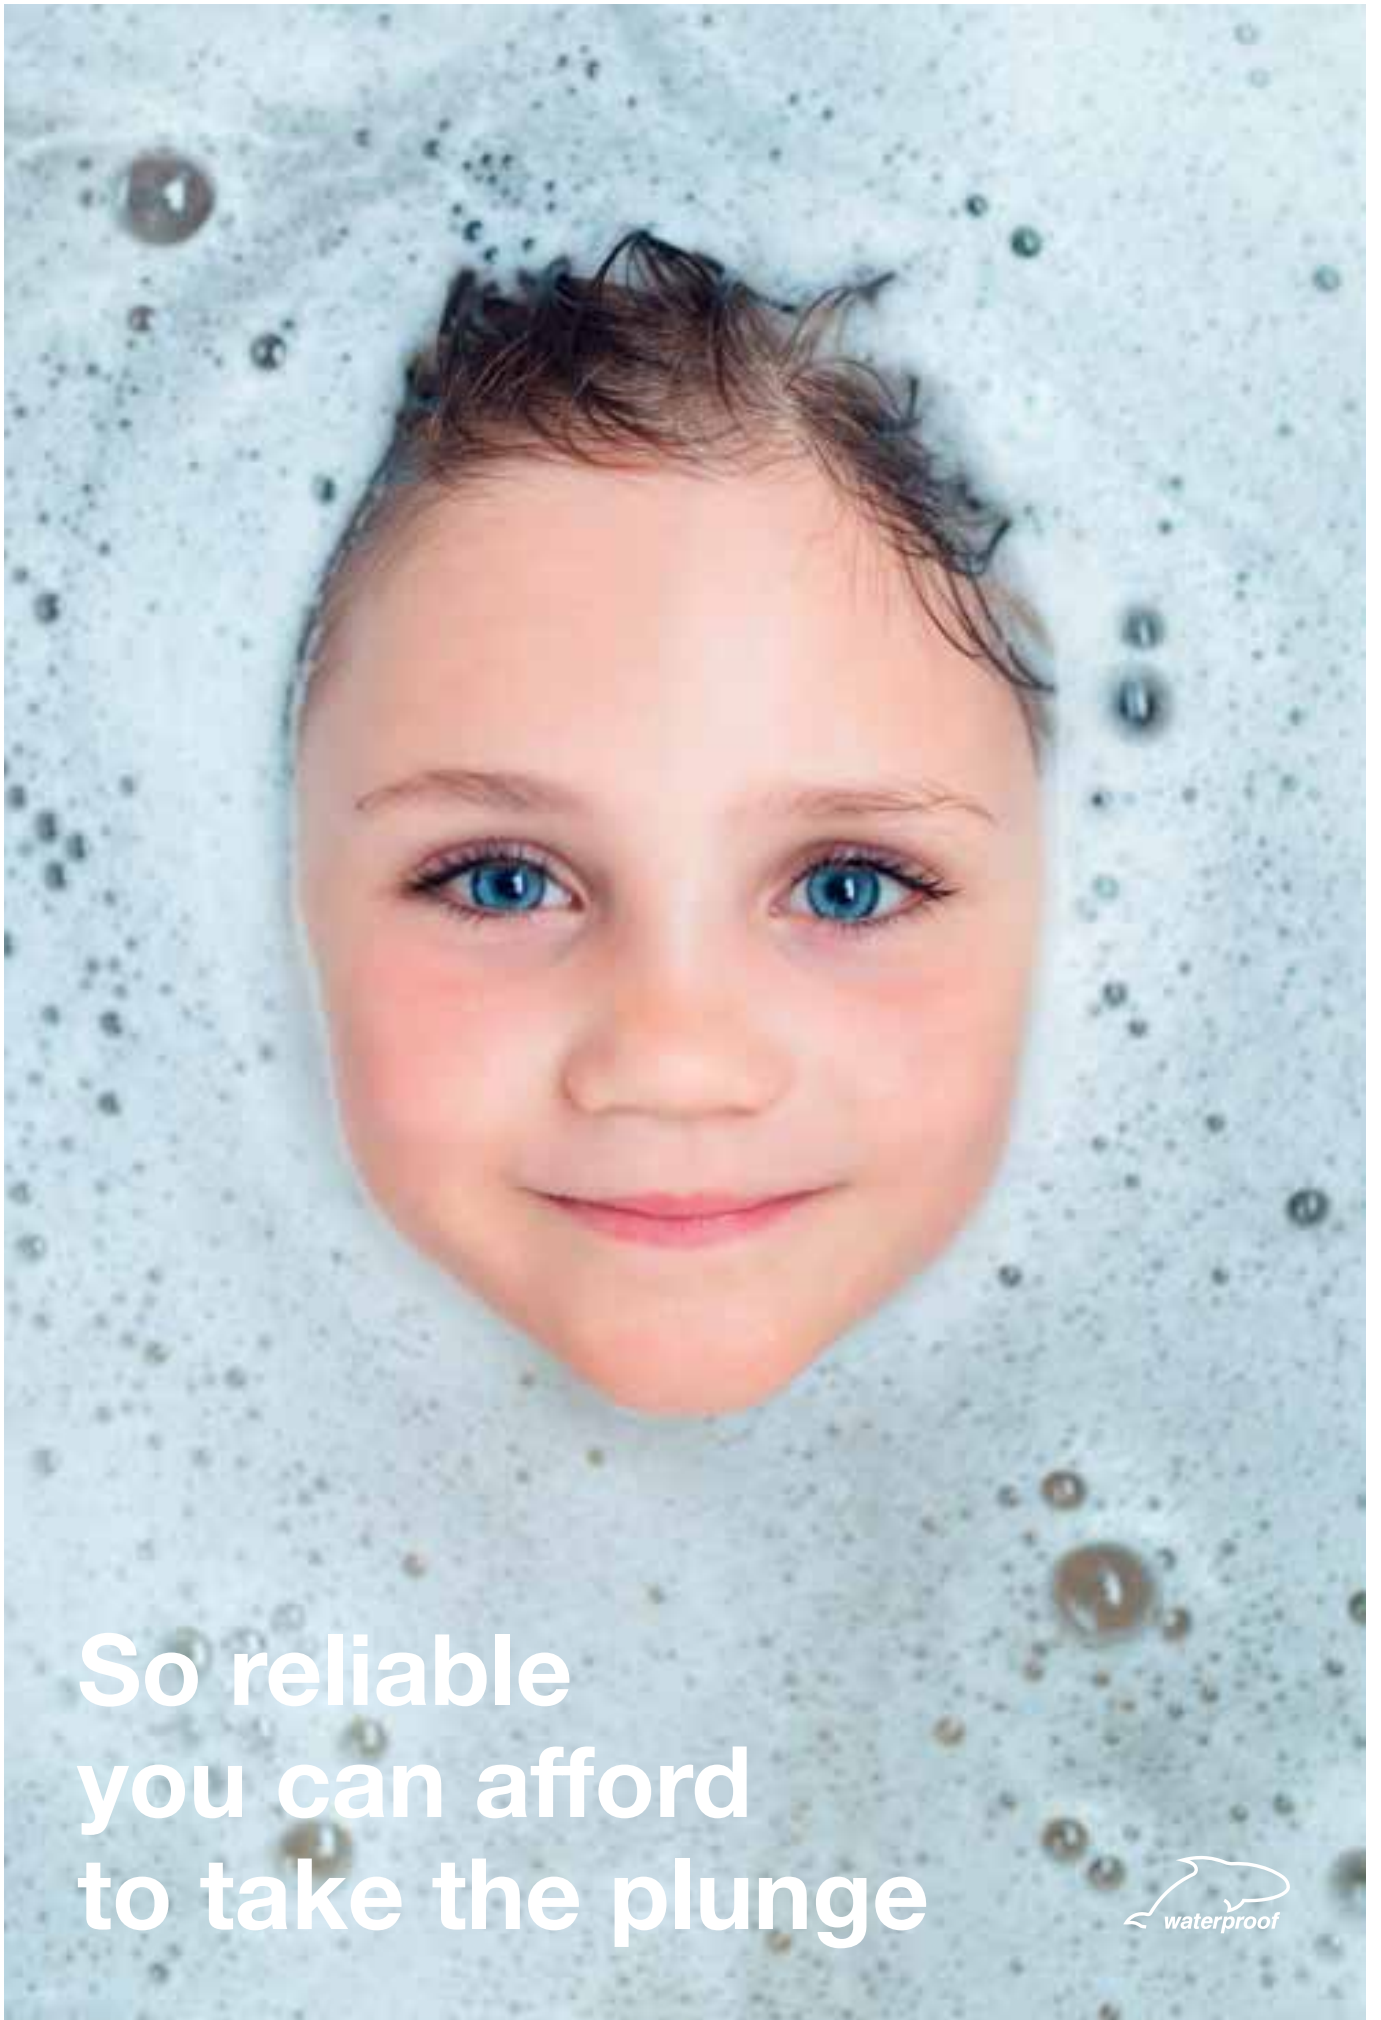

**So reliable  
you can afford  
to take the plunge**



# O.R.C.A.<sup>®</sup>

MOISTURE DEFENSE TECHNOLOGY

## The flooring that is naturally nature-friendly



[www.blauer-engel.de/uz176](http://www.blauer-engel.de/uz176)



### Sustainable

Sustainability isn't just a buzzword for us, but part of our corporate strategy. It would never cross our minds to use wood that didn't come from sustainably managed forests.

### CO<sub>2</sub>-negative

O.R.C.A. boards are CO<sub>2</sub>-negative because manufacturing O.R.C.A. releases less CO<sub>2</sub> than was stored by the tree.

### Organic

Our O.R.C.A. board consists of components based on biological raw materials and organic-chemical binding agents (synthetic resins) and thus is organic.

### PVC-free

Our O.R.C.A. products contain no PVC\*.



\* May contain traces of PVC, e.g. from packaging





**K501** Sand River Oak, TN




**rganic FLEX**  waterproof

with **PerfectPad**® Cork 1 mm



**K506** Lunar Range Oak, TN

Thickness 7 mm  
Lock 1clic 2go pure+



EN 16511



**K500** Pearl River Oak, TN



**K503** Pebble Manor Oak, TN



**K506** Lunar Range Oak, TN

**rganic FLEX**  waterproof


with **PerfectPad®** Cork 1 mm



**K501** Sand River Oak, TN



Thickness 7 mm  
Lock 1clic 2go pure+



EN 16511



**K501** Sand River Oak, TN



**K507** Hazel Range Oak, TN



**K504** Tuscan Manor Oak, TN

**Organic FLEX**  waterproof


with **PerfectPad®** Cork 1 mm



**K502** Flax River Oak, TN



Thickness 7 mm  
Lock 1clic 2go pure+



EN 16511



**K502** Flax River Oak, TN



**K505** Tobacco Manor Oak, TN



**K505** Tobacco Manor Oak, TN



**rganic FLEX**  waterproof

with **PerfectPad®** Cork 1 mm



**K510** Brooklyn Dark, US

Thickness 7 mm  
Lock 1clic 2go pure+



EN 16511



**K508** Brooklyn Mist, US



**K509** Brooklyn Vibe, US



**K510** Brooklyn Dark, US



K451 Silverdale Oak, HO



Thickness 8 mm  
Lock 1clic 2go pure+



EN 13329



**K451** Silverdale Oak, HO



**K284** Summer Breeze Oak, RO



**K450** Firebrand Oak, HO

Organic LONG 



8156 Red River Hickory, VH

Thickness 8 mm  
Lock 1clic 2go pure+



EN 13329



**K327** Hillside Oak, RO



**K287** Steelworks Oak, HO




**8156** Red River Hickory, VH





1532 Atlantic Oak, TO

Thickness 8 mm  
Lock 1cllic 2go pure



EN 13329



**1514** Arctic Oak, LP



**1532** Atlantic Oak, TO



**1536** Michigan Oak, NL



1533 Ontario Oak, TO



Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**1533** Ontario Oak, TO



**1519** Victoria Oak, HO



**1538** Toronto Oak, NL

Organic CLASSIC



1530 Bristol Oak, RF

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**1530** Bristol Oak, RF



**1523** Montreal Oak, NL








1521 Caribbean Light Oak, NL

Thickness 8 mm  
Lock 1cllic 2go pure



EN 13329



**1517** Pacific Oak, PO



**1521** Caribbean Light Oak, NL



**1531** Baltic Oak, NL






1579 Hudson Oak, LP



Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**1539** Liverpool Oak, HC



**1579** Hudson Oak, LP

Organic CLASSIC  waterproof




1527 Amazon Slate, OS



1527 Amazon Slate, OS

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**1525** Mississippi Slate, RT



**1528** Submarine Slate, AS



**1526** Yukon Slate, OS




**Organic CLEVER SILENT** 

with PS 1 mm



Thickness 6+1 mm  
Lock 1clic 2go pure+



EN 13329



**5543** Colorado Oak, NL



**5966** Khaki Oak, NL



**K468** Gondola Oak, NL

**Organic CLEVER SILENT** 


with PS 1 mm



**K461** Antique Volcano Oak, NL



Thickness 6+1 mm  
Lock 1clic 2go pure+



EN 13329



**5946** Rockford Oak, NL



**K482** Twilight Sterling Oak, NL



**K461** Antique Volcano Oak, NL


**Organic CLEVER SILENT** 

with PS 1 mm



**8168** Tobacco Oak, NL

Thickness 6+1 mm  
Lock 1clic 2go pure+



EN 13329



**K419** Armoury Oak, NL



**5985** Sherwood Oak, NL



**8168** Tobacco Oak, NL





## Laminate Flooring Take more. Endure more. Withstand more.

**mo.re!** from KRONOSPAN is a moisture-resistant laminate flooring product that makes laminate even more practical for everyday life.



**mo.re!** makes laminate flooring even more moisture-resistant. And that's a good thing. After all, small everyday mishaps can happen to anyone.

## How mo.re! technology works

**mo.re!** is based on a specially developed substrate formula.

Its new binding agent makes the flooring more durable and decreases swelling – improving resistance to moisture penetration.



Scan the QR code and check out the mo.re! features!



\* 48 h splash-water protection according to works standard specification KRONOSPAN WN-103, [www.floor-with-more.com](http://www.floor-with-more.com)



**Your floor  
can do mo.re!**



# mo.re! can stand up to what life brings



[www.blauer-engel.de/uz176](http://www.blauer-engel.de/uz176)



It is **much more moisture-resistant** than traditional laminate flooring

It is **A.B.C. surface\*** inhibits bacteria growth on floors to protect your family

It is **light-resistant**: Even on days when the sun is shining for hours, your flooring remains non-fading according to rating 6, the highest level of the Blue Wool Scale

It is **perfect for life with house pets** – the robust and hard-wearing surface masters the everyday challenges of households with pets

It is great for **installation in private bathrooms\*\***

It is available in **utilization classes 32 and 33** according to DIN EN 13329



\* Tested germs: Staphylococcus aureus \*\* Please refer to the installation instructions





## mo.re! for the environment

### mo.re! offers more, even for the environment

It is made using only wood from sustainably managed forests. And KRONOSPAN does not use any PVC in flooring with the mo.re! technology. This demonstrates our commitment to environmental stewardship. mo.re! substrate is CO<sub>2</sub>-negative: Processing a tree to make this product emits less CO<sub>2</sub> than the tree has stored in its life.

\* May contain traces of PVC, e.g. from packaging



**ALTITUDE**



2000 mm  
(78.74")  
242 mm  
(9.53")

**K392** Atomic Oak, RO



Thickness 12 mm  
Lock 1clic 2go pure



EN 13329



**5953** Chantilly Oak, HO



**5954** Hardy Oak, HO



**K392** Atomic Oak, RO



**ALTITUDE**



moisture  
resistant



**5948** Renaissance Oak, HO

Thickness 12 mm  
Lock 1clic 2go pure



EN 13329



**K326** Sundance Oak, RO



**8155** Appalachian Hickory, VH



**5948** Renaissance Oak, HO

# ATLANTIC 12




1285 mm  
(50.59")  
192 mm  
(7.56")

**K476** Inca Carpenter Oak, CM



Thickness 12 mm  
Lock 1cllic 2go pure



EN 13329



**K336** Iceberg Oak, HC



**K285** Haybridge Oak, HO




**K476** Inca Carpenter Oak, CM

ATLANTIC 12



5542 Boulder Oak, HC

Thickness 12 mm  
Lock 1cllic 2go pure



EN 13329



**5542** Boulder Oak, HC



**K287** Steelworks Oak, HO



**5541** Bedrock Oak, HC




**ATLANTIC 8**



1285 mm  
(50.59")  
192 mm  
(7.56")

**K460** Orchid Oak, NL

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K460** Orchid Oak, NL



**K451** Silverdale Oak, HO



**K392** Atomic Oak, RO


**ATLANTIC 8**



**K472** Dove Cashmere Oak, NL



Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K481** Urban Heritage Chestnut, NL



**K463** Weathered Volcano Oak, NL



**K472** Dove Cashmere Oak, NL

**ATLANTIC 8**



moisture  
resistant



**K452** Ashland Oak, HO

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K452** Ashland Oak, HO



**K469** Tortilla Cashmere Oak, NL



**K453** Biscotti Oak, HO




**ATLANTIC 8**



**K471** Antique Cashmere Oak, GT

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K326** Sundance Oak, RO



**K327** Hillside Oak, RO



**K471** Antique Cashmere Oak, GT


**ATLANTIC 8**



**K450** Firebrand Oak, HO



Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K450** Firebrand Oak, HO



**K461** Antique Volcano Oak, NL



**K480** Colonial Heritage Chestnut, NL

# Classic

LAMINATE  
FLOORING

## Give your surroundings a unique flair



Laminate enjoys a fantastic reputation as an absolute all-rounder. There is hardly an area or room that is not suitable for its installation. Whether children's rooms or living rooms, offices or shops, with or without pets – laminate flooring is a beautiful and uncomplicated partner thanks to its robustness and durability.

The list of advantages of laminate flooring is long – easy to clean and therefore hygienic, anti bacterial thanks to surface structures that bacteria cannot adhere to, light-resistant and hard-wearing. Last but not least, there is the seemingly endless range of sizes, decors and surfaces, that leave nothing to be desired.

## Authenticity you can see and feel

**Very close to the original – these are laminate decors, whose appearance is made up of two factors – image and surface.**

Color and light form the symbiosis for a perfect reproduction of wood, stone and tiles. And the perfect optical representation is complemented by the tactile reproduction. Vision and touch, the interaction of the senses.





**Fantastic look**



# Classic

LAMINATE  
FLOORING

## Favourite for everyday living



### Easy to install

The sophisticated KronoOriginal® click systems make installation child's play. The prerequisite is good preparation – having all panel materials, accessories and tools at the ready, as well as planning with the help of the checklist and the appropriate instructions.

### The floor for every requirement

An important factor when choosing a laminate floor is the utility class. The more a room is frequented and therefore the floor is challenged, the higher the usage class has to be. The utility class describes the possible stress on the entire panel and thus indicates whether the flooring is recommended mainly for private or also for commercial use. This consideration is important regarding to the warranty conditions.



#### Utilization class 32 (EN 13329)

Suitable for heavy domestic and medium commercial use



### Healthy living

The special „ABC – Anti Bacterial Comfort“ coating on the panels ensures that bacteria, dust mites and microbes have no chance of settling on them. This makes cleaning the laminate flooring easier and quicker and therefore particularly hygienic.

Healthy living also means that additives such as PVC\*, chloride or wood preservatives are not used and can therefore neither trigger nor intensify allergies.

### Sustainable

Laminate flooring consists of around 90 percent predominantly residual wood, which comes exclusively from sustainably managed forestry. This is guaranteed by the PEFC and FSC certificates.

Generally, all production processes are low-emission and therefore sustainable.

\* May contain traces of PVC, e.g. from packaging



[www.blauer-engel.de/liz176](http://www.blauer-engel.de/liz176)


VINTAGE



**K475** Virgin Scandi Larch, VS



Thickness 10 mm  
Lock 1clic 2go pure



EN 13329



**K475** Virgin Scandi Larch, VS



**5953** Chantilly Oak, HO



**K478** Mushroom Carpenter Oak, CM

# VINTAGE



**K474** Oyster Scandi Larch, VS

Thickness 10 mm  
Lock 1clic 2go pure



EN 13329



**K473** Pearl Scandi Larch, VS



**K474** Oyster Scandi Larch, VS



**K413** Blackwater Oak, OE




# VINTAGE



**K477** Natural Carpenter Oak, CM

Thickness 10 mm  
Lock 1clic 2go pure



EN 13329



**5943** Natural Hickory, VH



**K477** Natural Carpenter Oak, CM



**5947** Historic Oak, HO

VINTAGE



**K476** Inca Carpenter Oak, CM



Thickness 10 mm  
Lock 1clic 2go pure



EN 13329



**5537** Tawny Chestnut, RC



**K476** Inca Carpenter Oak, CM



**8155** Appalachian Hickory, VH

VINTAGE



K411 Laguna Oak, OE

Thickness 10 mm  
Lock 1clic 2go pure




EN 13329



**K412** Doubloon Oak, OE



**K411** Laguna Oak, OE

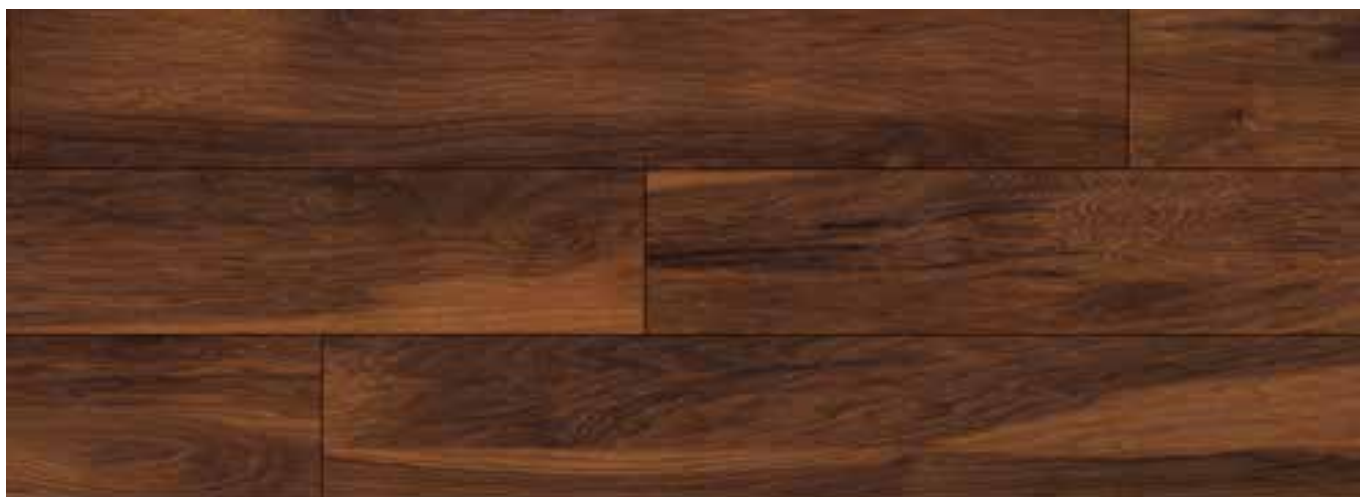

**8156** Red River Hickory, VH



VINTAGE



K414 Corsair Oak, OE

Thickness 10 mm  
Lock 1clic 2go pure



EN 13329



**K479** Espresso Carpenter Oak, CM



**K414** Corsair Oak, OE



**K414** Corsair Oak, OE

# IMPRESSIONS





Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K385** Ice Flow, RT



**4375** Pearl Grey Oxide, AS



**K035** Crosstown Traffic, AS

# IMPRESSIONS



**K388** Pewter Slate, OS

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K387** Silverado Slate, OS



**K388** Pewter Slate, OS



**K389** Nightfall Slate, OS



# SUPER NATURAL



1285 mm  
(50.59")  
192 mm  
(7.56")

**K484** Misty Sterling Oak, NL

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**8630** Aspen Oak, LP



**K484** Misty Sterling Oak, NL



**5543** Colorado Oak, HC

# SUPER NATURAL



**K485** Natural Sterling Oak, NL



Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K418** Longbow Oak, GT



**5542** Boulder Oak, HC



**K485** Natural Sterling Oak, NL

**SUPER NATURAL**



**5946** Rockford Oak, NL

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**8575** Blonde Oak, LP



**5966** Khaki Oak, NL



**5946** Rockford Oak, NL



# SUPER NATURAL



**K057** Clearwater Oak, GT

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K408** Outback Pine, NL



**K057** Clearwater Oak, GT



**5985** Sherwood Oak, GT



# SUPER NATURAL



**K483** Antique Sterling Oak, NL



Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**K338** Credenza Oak, NL



**K483** Antique Sterling Oak, NL



**K468** Gondola Oak, GT

**SUPER NATURAL**



**K419** Armoury Oak, GT

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**8573** Harlech Oak, LP



**K419** Armoury Oak, GT



**8631** Castle Oak, LP



# SUPER NATURAL



**K482** Twilight Sterling Oak, NL

Stärke 8 mm

Verbindung 1clic 2go pure



EN 13329



**K407** Ashenwood Oak, GT



**K482** Twilight Sterling Oak, NL



**8633** Shire Oak, LP

**SUPER NATURAL**



**8274** Modena Oak, RF



Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**8274** Modena Oak, RF



**5541** Bedrock Oak, HC



# CASTELLO



5529 Oregon, NL

Thickness 8 mm  
Lock Twin Clic



EN 13329



**K396** Skydive Oak, NL



**4282** Reykjavik Oak, NL



**5529** Oregon, NL



# CASTELLO



**K470** Natural Cashmere Oak, GT

Thickness 8 mm  
Lock Twin Clic



EN 13329



**K406** Eurus Oak, NL



**K470** Natural Cashmere Oak, GT



# CASTELLO



**K462** Gold Volcano Oak, NL



Thickness 8 mm  
Lock Twin Clic



EN 13329



**8072** Nostalgia Oak, RF



**K462** Gold Volcano Oak, NL



# CASTELLO



**K395** Tornado Oak, NL

Thickness 8 mm  
Lock Twin Clic



EN 13329



**K039** Silverside Driftwood, GT



**K040** Urban Driftwood, GT



**K395** Tornado Oak, NL



# Accessories that match your floor perfectly

## Selected range of products

Every floor needs proper accessories. We can supply you with the ideal equipment for all types of flooring. One contact, one supplier – which makes everything so much simpler for you.

### Underlays

Depending on the situation in the room, attention must be paid to the correct underlay material when installing the flooring. For this we offer multiple solutions.

### Skirting boards

Choose from a range of skirtings in various decors that match all KronoOriginal® floors. Our advanced fixing system makes it quick and simple to achieve a perfect installation.

### Additional accessories

If you still look for the proper skirting board, corner pieces, aluminium adhesive tape for sealing or you are done and wish to mop the floor, take a look at the following pages and discover the wide range of accessories.

## All under one roof

**Our guidance system shows the  
matching products for different  
types of floor.**



**Organic VENEER PARQUET:**  
Height: 8.5 mm



**SPC flooring:**  
Height: 5 mm and 5+1 mm, including  
acoustic layer, floating installation



**O.R.C.A. flooring:**  
Height: 6+1, 7 and 8 mm, organic  
rigid coreboard, floating installation






































**Laminate flooring:**  
Height: 8 – 12 mm








































## Underlays




































Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Underlay PUR 1.0		98535 [EX PUR1.0_ORCA]  98535 [EX PUR1.0_SPC]	Material: PET film + polyurethane heavy- duty layer + non-woven material	1 x 10 m = 10 m <sup>2</sup>	   
Underlay PUR 2.0		98571 [EX KO98571N]	Material: Polyurethan and mineral fillers	1 x 7.5 m = 7.5 m <sup>2</sup>	   
Underlay WOOD 5.0		90171 [EX 90171]	Material: Wood fibres	0.79 x 0.59 m x 15 = 7 m <sup>2</sup>	   
Underlay XPS 5.0		98536 [EX XPS5.0]	Material: Extruded polystyrene	1.18 x 4.7 m = 5.5 m <sup>2</sup>	   
Underlay XPS 2.2 ALU		98515 [EX XPS2.2ALU]	Material: HFPS-foam & moisture protection foil	1.2 x 12.5 m = 15 m <sup>2</sup>	   
PE foil		98111 [EX FOLIE2.0]	Material: Polyethylene	2 x 7.5 m = 15 m <sup>2</sup>	   
Aluminium tape		98191 [EX ALUBAND]	Thickness: 0.048 mm Width: 50 mm	1 roll (50 m)	   






































# Profile systems

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Design click transition profile, 2-part		95112 95113	900 mm or 2700 mm	1 pcs.	   
Design click ramp profile, 2-part		95122 95123	900 mm or 2700 mm	1 pcs.	   
Design click end profile, 2-part		95132 95133	900 mm or 2700 mm	1 pcs.	   
Transition click profile		98391 98381	900 mm or 2700 mm	1 pcs.	   
Ramp click profile		98411 98401	900 mm or 2700 mm	1 pcs.	   
End click profile		98371 98361	900 mm or 2700 mm	1 pcs.	   
3in1 profiles		95315 [EX 95315-A002] anodised stainless steel	1000 mm	10 pcs.	   

## Skirting boards


























Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
K58C		91061 [EX xxxxSLH]	2600 x 58 x 18 mm	10 pcs.	   
K58C		97345 [EX SK58C-xxxx]	2400 x 58 x 18 mm	10 pcs.	   
K58C moisture resistant		95316 [EX xxxxSLH-ORCA]	2600 x 58 x 18 mm	10 pcs.	   
Square cut skirting board		95951 [EX 9002DS19_100]	2600 x 100 x 17 mm	5 pcs.	   
Square cut skirting board		95481 [EX 9002DS19_70]	2600 x 70 x 17 mm	10 pcs.	   
Square cut skirting board		95491 [EX 9002DS19_58]	2600 x 58 x 17 mm	10 pcs.	   
Shaped skirting board		95981 [EX 9002DS17_100]	2600 x 100 x 17 mm	5 pcs.	   

# Skirting boards

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Shaped skirting board		95991 [EX 9002DS17_70]	2600 x 70 x 17 mm	10 pcs.	   
Shaped skirting board		95471 [EX 9002DS17_58]	2600 x 58 x 17 mm	10 pcs.	   
Rounded skirting board		96001 [EX 9002DS15_100]	2600 x 100 x 15 mm	5 pcs.	   
Rounded skirting board		96021 [EX 9002DS16_90]	2600 x 90 x 16 mm	5 pcs.	   
Rounded skirting board		96011 [EX 9002DS15_70]	2600 x 70 x 17 mm	10 pcs.	   
Accessories for K58C skirting board		98011 98001 98021	External corners Internal corners End caps	90° in packs of 2 90° in packs of 2 in packs of 4, 2 left and 2 right	   
Mounting clips		91501 [EX 50510]	-	Box of 30 pieces, complete with screws and rawl plugs	   



















































































































## Additional accessories


Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Tap-block		90274 [EX SCHLAGKLOTZ]	168/90 x 70 x 20 mm	20 pcs.	   
Clickguard™ joint sealant		90431 [EX 94270]	-	125 ml ≈ ca. 10 m <sup>2</sup>	   
Laminate cleaner		90411 [EX 92011]	-	1000 ml	   
Design floor cleaner		97554 [EX DESIGNBODEN_ REINIGER]	-	750 ml	   
Cleaner for floors with O.R.C.A. technology		90411 [EX REINIGER_ORCA]	-	750 ml	   



# Decor overview

Flooring Type	Collection Name	Decors
Veneer Parquet	<b>Organic VENEER PARQUET</b>	         O273 O462 O350 O274 O940 O272 O941 O352 O351
SPC Flooring	<b>ROCKO</b>	          R079 R129 R078 R071 R148 R063 R109 R077 R065 R125
O.R.C.A. Flooring	<b>Organic FLEX</b>	          K500 K508 K503 K506 K501 K504 K507 K502 K509 K505
	<b>Organic LONG</b>	      K284 K451 K287 K327 K450 8156
	<b>Organic CLASSIC</b>	          1525 1514 1532 1517 1521 1528 1527 1531 1536 1519
	<b>Organic CLEVER SILENT</b>	         5543 5966 5985 K419 K468 K461 K482 5946 8168
	<b>ALTITUDE</b>	      5953 5954 K392 K326 8155 5948
mo.re! Laminate Flooring	<b>ATLANTIC 12</b>	      K336 5542 K285 K476 K287 5541
	<b>ATLANTIC 8</b>	          K460 K451 K392 K463 K472 K453 K469 K452 K326 K450
	<b>VINTAGE</b>	          K475 5953 K478 K473 K474 K413 5943 K477 5947 5537
Classic Laminate Flooring	<b>IMPRESSIONS</b>	      K385 4375 K035 K387 K388 K389
	<b>SUPER NATURAL</b>	          8630 K484 5543 K418 5542 K485 8575 5966 5946 K408
	<b>CASTELLO</b>	          K396 4282 5529 K039 K395 K040 K406 K470 8072 K462





R066

R128

R126

R123

R073

R065

R081

R149

R124

R082

R090

R070

K538

R150

R076



K510



1523

1533

1530

1538

1539

1579

1526



K481

K471

K327

K461

K480



K476

8155

K412

K411

8156

K414

K479



K407

K482

8631

K419

K057

5985

K338

K483

K468


8573

8274

8633

5541

## Packaging information

Flooring Type	Collection Name	Plank Size	Thickness	Planks/ Pack.	m <sup>2</sup>   sq ft/Pack.
Veneer Parquet	 <b>ORGANIC VENEER PARQUET</b>	1383 x 244 mm   54.45" x 9.61"	8.5 mm	7	2.36   25.42
SPC Flooring	<b>ROCKO</b>	1210 x 192 mm   47.64" x 7.56"	5+1 mm	7	1.63   17.55
		1210 x 192 mm   47.64" x 7.56"	5 mm	8	1.86   20.02
		1210 x 234 mm   47.64" x 9.21"	5 mm	7	1.98   21.31
		1210 x 295 mm   47.64" x 11.61"	5 mm	7	2.50   26.91
O.R.C.A. Flooring	 <b>ORGANIC FLEX</b>	638 x 322 mm   25.12" x 12.68"	7 mm	12	2.47   26.53
		1288 x 189 mm   50.71" x 7.44"	7 mm	10	2.43   26.16
	 <b>ORGANIC LONG</b>	2003 x 195 mm   78.86" x 7.68"	8 mm	7	2.73   29.42
	 <b>ORGANIC CLASSIC</b>	635 x 327 mm   25.00" x 12.87"	8 mm	11	2.28   24.54
		1285 x 192 mm   50.59" x 7.56"	8 mm	9	2.22   23.89
	 <b>ORGANIC CLEVER SILENT</b>	1288 x 195 mm   50.71" x 7.68"	6+1 mm	9	2.26   24.32
mo.re! Laminate Flooring	<b>ALTITUDE</b>	2000 x 242 mm   78.74" x 9.53"	12 mm	4	1.94   20.83
	<b>ATLANTIC 12</b>	1285 x 192 mm   50.59" x 7.56"	12 mm	6	1.48   15.93
	<b>ATLANTIC 8</b>	1285 x 192 mm   50.59" x 7.56"	8 mm	9	2.22   23.89
Classic Laminate Flooring	<b>VINTAGE</b>	1285 x 192 mm   50.59" x 7.56"	10 mm	7	1.73   18.58
	<b>IMPRESSIONS</b>	635 x 327 mm   25.00" x 12.87"	8 mm	11	2.28   24.54
	<b>SUPER NATURAL</b>	1285 x 192 mm   50.59" x 7.56"	8 mm	9	2.22   23.89
	<b>CASTELLO</b>	1285 x 192 mm   50.59" x 7.56"	8 mm	9	2.22   23.89

**Weight/Pack.  
[kg | lbs]**

**Pack./Pallet  
= m<sup>2</sup> | sq ft**

16 | 35

45 = 106 | 1144

16 | 35

72 = 117 | 1259

17 | 37

52 = 97 | 1044

19 | 42

48 = 95 | 1022

23 | 51

45 = 112 | 1206

16 | 35

32 = 79 | 849

16 | 35

52 = 126 | 1356

20 | 44

40 = 109 | 1177

17 | 36

32 = 73 | 786

16 | 35

52 = 115 | 1242

13 | 29

52 = 117 | 1265

20 | 44

36 = 70 | 750

15 | 34

52 = 77 | 828

15 | 34

52 = 115 | 1242

15 | 33

52 = 90 | 966

15 | 34

32 = 73 | 786

15 | 34

52 = 115 | 1242

15 | 34

52 = 115 | 1242



**R129** White Poppy [ROCKO]





Made by Kronospan



[www.krono-original.com](http://www.krono-original.com)  
[www.facebook.com/KronoOriginal](https://www.facebook.com/KronoOriginal)



[www.kronospan.com](http://www.kronospan.com)  
[info@krono-original.com](mailto:info@krono-original.com)